


Dimensions

Product dimensions (mm)	L1295 x L2295
Height (mm)	H60
Weight (g)	2.150

Ceiling cutting dimensions (mm)	L3280 x L4280
---------------------------------	---------------

Schematic

Product drawings

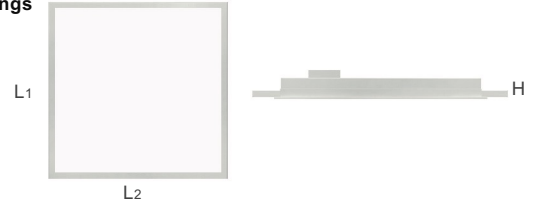

FLATTY SS RECESSED

DESCRIPTION

FLATTY LED luminaire product series have metal sheet body with electrostatic powder painted which allows wide application areas in lighting projects. It can also be selected as IP40, IP44 and IP54 protection rate upon request.

FLATTY LED provides homogeneous lighting with low glare and thanks to its well designed passive cooling system which ensures long LED and driver lifetime.

FLATTY LED is able to be controlled via DALI protocol and wirelessly control as optional. It is also possible to integrate emergency conversion modules as 1 hour or 3 hours backup time depends on project application field.

FLATTY LED can be used in projects such as offices, hotels, retail stores, educational facilities, hospitals...etc.

Item code	PNL42
Application type	Indoor applications
Category	Recessed luminaires
Product family	FLATTY
Subcategory	FLATTY SS
Material	Luminaire body made of 0,6mm metal sheet and aluminium frame injection body with 80 micron electrostatic powder paint.
Optical system	Opal PMMA diffuser with low glare effect.
Mounting options	Plasterboard, metal and other suspended ceilings.

Accessories

PB	Mounting brackets for plasterboard ceiling
MC11	Mounting brackets for metal ceiling

Optional

3HEM	3 hours emergency conversion module
OMP	Microprismatic lens
RMT	Wireless control module(BLE)
DT8	TunableWhite Lighting
HP40	IP40 protection class
HP44	IP44 protection class
HP54	IP54 protection class

Product	PNL42
Real power (W)	22/32
Real lumen output (Lm)	L3280 x L4280
Light output ratio LOR (%)	72%
Efficacy (Lm/W)	103
Beam angle (°)	114°
Lifespan (h)	35000
IP rate	IP20/40/44/54
IK rate	IK05
Isolation class	Class 2
Photobiological risk group	RG0 (no risk)
Diffuser/Optical constituent	Opal PMMA diffuser
Ambient operating temperature	-15°C , +35°C
Electrical feeding	220..240VAC, 50/60Hz
Body colour options (RAL)	<input type="radio"/> 9005 <input type="radio"/> 9006 <input type="radio"/> 7016 <input type="radio"/> 9016 + any RAL
Energy efficiency class	A+


Driver/Power Supply

Driver included	Yes
Driver type	Electronic driver
Flicker free	Yes

Light source included	Yes
Light source type	LED
LED type	SMD
Nominal power (W)	20/30
Total lumen (Lm)	3055/4584
CCT (K)	2700/3000/4000/5500/6500/TW
MacAdam (SDCM)	3
Colour rendering index (CRI, Ra)	>80

Photometry

Light distribution



PRODUCT SELECTION

ORDER CODE	POWER (W)	LUMEN (lm)	CCT (K)	CRI (Ra)	BODY FORM	BODY COLOUR	IP	MOUNTING	CONTROL TYPE	WXL (mm)	CUTOUT (mm)
PNL42.02.1.1.30R21SW	20W	2200	3000K	>80	SQUARE	WHITE	IP40	RECESSED	ON-OFF	295X295	60
PNL42.02.1.1.40R21SW	20W	2200	4000K	>80	SQUARE	WHITE	IP40	RECESSED	ON-OFF	295X295	60
PNL4.02.1.1.30R21DA	20W	2200	3000K	>80	SQUARE	WHITE	IP40	RECESSED	DALI	295X295	60
PNL42.02.1.1.40R21DA	20W	2200	4000K	>80	SQUARE	WHITE	IP40	RECESSED	DALI	295X295	60
PNL42.02.1.2.30R21SW	30W	3300	3000K	>80	SQUARE	WHITE	IP40	RECESSED	ON-OFF	295X295	60
PNL42.02.1.2.40R21SW	30W	3300	4000K	>80	SQUARE	WHITE	IP40	RECESSED	ON-OFF	295X295	60
PNL42.02.1.2.30R21DA	30W	3300	3000K	>80	SQUARE	WHITE	IP40	RECESSED	DALI	295X295	60
PNL42.02.1.2.40R21DA	30W	3300	4000K	>80	SQUARE	WHITE	IP40	RECESSED	DALI	295X295	60