



MAGNOKLICK SYSTEM

As a system product MAGNOKLICK offers flexible and free lighting instruments in architectural lighting applications. In a single system structure; accent lighting, general lighting and decorative lighting design works can easily be done. With its magnet integrated trunking canal system, the luminaires are able to be fed from any canal location which provides flexible installations.

In addition to this, the system power supply comes externally with 24VDC which brings safety for users. All lighting luminaires are been integrated with high efficient SMD/Power LED lights. The system also provides different optical materials such as light diffusers, optical lenses, reflective and refractives for large applicaiton purposes.

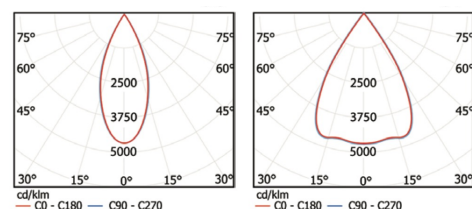
MAGNOKLICK can be used in different project applications such as art galleries, museums, hotels, retails, residencial...etc.

Item code	TRM100
Application type	Indoor applications
Category	Architectural
Product family	SYSTEM
Subcategory	MAGNOKLICK
Material	Magnet integrated canal body made of aluminium extruded materia with electrostatic powder paint.
Optical system	Opal PMMA diffuser, reflectors/refractives.
Mounting options	Trimless recessed, surface or suspended mounting options.
Accessories	
RC09	Trimless mounting brackets
SMPS	24VDC power supply
Optional	
HML	Honeycomb louver
SBM	Surface mounting bracket
RMT	Wireless control modüle (BLE)
ST01	1m suspension wire with cable















Product	TRM100
Isolation class	Class 1
Photobiological risc group	RG0 (no risk)
Diffuser/Optical constituent	Multiple optical preferences
Ambient operating temperature	0°C, +35°C
Electrical feeding	24VDC
Body colour options (RAL)	<input type="radio"/> 9005 <input type="radio"/> 9006 <input type="radio"/> 7016 <input type="radio"/> 9016 + any RAL
Energy efficiency class	A
Driver/Power Supply	
Driver included	No
Driver type	External power supply needed
Light source included	
Light source included	Yes
Light source type	LED
LED type	SMD/Power LED
CCT (K)	2700/3000/4000/5500/6500/TW
MacAdam (SDCM)	3/4
Colour rendering index (CRI, Ra)	>80

Photometry

Light distribution



PRODUCT SELECTION

IMAGE	SCHEMATIC	DESCRIPTION	ORDER CODE	POWER (W)	LUMEN (lm)	CCT (K)	CRI (Ra)	BODY FORM	BODY COLOUR	IP	MOUNTING TYPE	CONTROL TYPE	L1, L2 (mm)	W (mm)	Ø (mm)	H (mm)
		MAGNOKLICK CANAL	TRM100.02.0.1.00.T1100	-	-	-	-	RECTANGULAR	WHITE	IP20	RECESSED	-	1000	43	-	40
			TRM100.02.0.1.00.T1200	-	-	-	-	RECTANGULAR	BLACK	IP20	RECESSED	-	1000	43	-	40
			TRM100.02.0.2.00.T1100	-	-	-	-	RECTANGULAR	WHITE	IP20	RECESSED	-	2000	43	-	40
			TRM100.02.0.2.00.T1200	-	-	-	-	RECTANGULAR	BLACK	IP20	RECESSED	-	2000	43	-	40
			TRM100.02.0.3.00.T1100	-	-	-	-	RECTANGULAR	WHITE	IP20	RECESSED	-	3000	43	-	40
			TRM100.02.0.3.00.T1200	-	-	-	-	RECTANGULAR	BLACK	IP20	RECESSED	-	3000	43	-	40
		MAGNOKLICK 24VDC LINEAR OP LED LUMINAIRE	TRM101.02.1.1.30K11SW	10W	1300	3000K	>80	RECTANGULAR	WHITE	IP20	LV TRACK	ON-OFF	330	35	-	56
			TRM101.02.1.1.30K12SW	10W	1300	3000K	>80	RECTANGULAR	BLACK	IP20	LV TRACK	ON-OFF	330	35	-	56
			TRM101.02.1.1.40K11SW	10W	1300	4000K	>80	RECTANGULAR	WHITE	IP20	LV TRACK	ON-OFF	330	35	-	56
			TRM101.02.1.1.40K12SW	10W	1300	4000K	>80	RECTANGULAR	BLACK	IP20	LV TRACK	ON-OFF	330	35	-	56
		MAGNOKLICK 24VDC LINEAR LN LED LUMINAIRE	TRM102.02.5.1.30K11SW	12W	1500	3000K	>80	RECTANGULAR	WHITE	IP20	LV TRACK	ON-OFF	164	35	-	56
			TRM102.02.5.1.30K12SW	12W	1500	3000K	>80	RECTANGULAR	BLACK	IP20	LV TRACK	ON-OFF	164	35	-	56
			TRM102.02.5.1.40K11SW	12W	1500	4000K	>80	RECTANGULAR	WHITE	IP20	LV TRACK	ON-OFF	164	35	-	56
			TRM102.02.5.1.40K12SW	12W	1500	4000K	>80	RECTANGULAR	BLACK	IP20	LV TRACK	ON-OFF	164	35	-	56
		MAGNOKLICK 24VDC LINEAR TL LED LUMINAIRE	TRM104.02.5.1.30K11SW	12W	1500	3000K	>80	RECTANGULAR	WHITE	IP20	LV TRACK	ON-OFF	164	35	-	180
			TRM104.02.5.1.30K12SW	12W	1500	3000K	>80	RECTANGULAR	BLACK	IP20	LV TRACK	ON-OFF	164	35	-	180
			TRM104.02.5.1.40K11SW	12W	1500	4000K	>80	RECTANGULAR	WHITE	IP20	LV TRACK	ON-OFF	164	35	-	180
			TRM104.02.5.1.40K12SW	12W	1500	4000K	>80	RECTANGULAR	BLACK	IP20	LV TRACK	ON-OFF	164	35	-	180
		MAGNOKLICK 24VDC TRACK R1 LED LUMINAIRE	TRM105.00.7.1.30K11SW	10W	1300	3000K	>80	CYLINDRICAL	WHITE	IP20	LV TRACK	ON-OFF	160	-	50	125
			TRM105.00.7.1.30K12SW	10W	1300	3000K	>80	CYLINDRICAL	BLACK	IP20	LV TRACK	ON-OFF	160	-	50	125
			TRM105.00.7.1.40K11SW	10W	1300	4000K	>80	CYLINDRICAL	WHITE	IP20	LV TRACK	ON-OFF	160	-	50	125
			TRM105.00.7.1.40K12SW	10W	1300	4000K	>80	CYLINDRICAL	BLACK	IP20	LV TRACK	ON-OFF	160	-	50	125
		MAGNOKLICK 24VDC LINEAR SM LED LUMINAIRE	TRM106.02.7.1.30K11SW	19W	2400	3000K	>80	RECTANGULAR	WHITE	IP20	LV TRACK	ON-OFF	335	34	-	125
			TRM106.02.7.1.30K12SW	19W	2400	3000K	>80	RECTANGULAR	BLACK	IP20	LV TRACK	ON-OFF	335	34	-	125
			TRM106.02.7.1.40K11SW	19W	2400	4000K	>80	RECTANGULAR	WHITE	IP20	LV TRACK	ON-OFF	335	34	-	125
			TRM106.02.7.1.40K12SW	19W	2400	4000K	>80	RECTANGULAR	BLACK	IP20	LV TRACK	ON-OFF	335	34	-	125
		MAGNOKLICK 24VDC PENDANT R1 LED LUMINAIRE	TRM107.00.7.1.30K11SW	9W	1200	3000K	>80	CYLINDRICAL	WHITE	IP20	LV TRACK	ON-OFF	500	-	50	1000
			TRM107.00.7.1.30K12SW	9W	1200	3000K	>80	CYLINDRICAL	BLACK	IP20	LV TRACK	ON-OFF	500	-	50	1000
			TRM107.00.7.1.40K11SW	9W	1200	4000K	>80	CYLINDRICAL	WHITE	IP20	LV TRACK	ON-OFF	500	-	50	1000
			TRM107.00.7.1.40K12SW	9W	1200	4000K	>80	CYLINDRICAL	BLACK	IP20	LV TRACK	ON-OFF	500	-	50	1000